

Automatic Drain Valves



▶ GZ HD

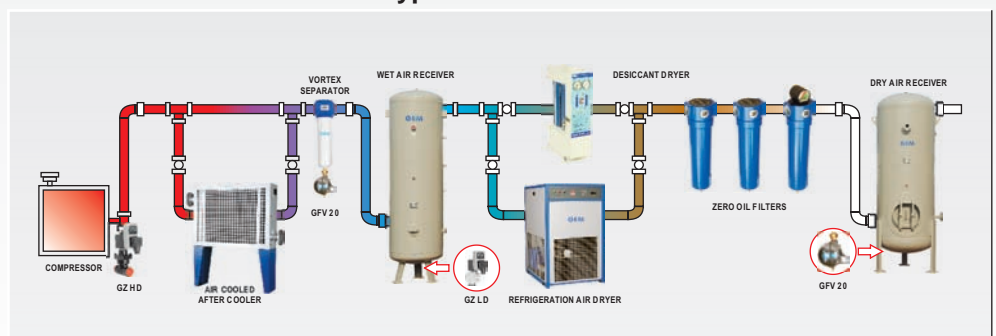


▶ GZ LD






▶ GFV 20

Typical Installation



Automatic Drain Valves

	GZ - HD	GZ - LD	GFV 20
			
	<ul style="list-style-type: none"> ● Universal Voltage and Frequency "Any Where ... Any Country" ● UNO Piston ● Manual Test Switch 	<ul style="list-style-type: none"> ● Universal Voltage and Frequency "Any Where ... Any Country" ● Viton Seals in Valve for long life 	<ul style="list-style-type: none"> ● Zero Air Loss ● No Electricity . . . No Noise ● Robustic Design ● Manual Discharge ● Cleanable Orifice ● Float Type
Valve Opening Interval	0.5 - 35 min (adjustable)	0.5 - 35 min (adjustable)	-
Valve Discharge	0.5 - 20 sec (adjustable)	0.5 - 20 sec (adjustable)	-
Power Consumption	10 W	10 W	-
Max. Operating Temp.	90° C	90° C	90° C
Max. Operating Pres.	16 bar (g)	16 bar (g)	20 bar (g)
Orifice	6 mm	3 mm	3 mm
In/Out Ports	1/2" BSP	1/2" BSP	1/2" BSP
Connector		DIN43650A	-
Environmental Protect	IP65	IP65	-
Type	Pilot Operated	Direct Operated	Float Operated
Max. discharge at 7 bar	150 lit/hr	60 lit/hr	300 lit/hr
Weight	0.5 kg	0.5 kg	0.90 Kg
Accessories (Extra)			
Strainer	✓	✓	✓
Pilot Tubing	✓	✓	✓
Connector Tubing	✓	✓	✓
Application			
Dryers	✓	✓	✓
Receivers	✓	✓	✓
Filters	✓	✓	✓
Moisture Separators	✓	✓	✓
After Coolers			✓
Vortex Separator	✓	✓	✓
Compressors upto	2000 CFM	100 CFM	3000 CFM
Valve Body	Cast Aluminium	Cast Aluminium	Die Cast Aluminium

GEM Equipments (P) Ltd.

S.F.No. 103, Avanashi Road,
Arasur, Coimbatore,
Tamil Nadu 641 407, INDIA.

Phone : +91 422 2363800, 2363836,
2363837
Fax : +91 422 2360523

E-mail : sales@gemindia.com,
service@gemindia.com
Web site : <http://www.gemindia.com>

Regional Office Email: chennai@gemindia.com • mumbai@gemindia.com • delhi@gemindia.com • pune@gemindia.com

www.velman.com